




**WACKER
NEUSON**
all it takes!



Vibrator head H25HA

5000610058

[Home](#) >> [Catalog](#) >> [Products](#) >> [Concrete Technology](#) >> [Internal Vibrators](#) >> [Modular Internal Vibrators](#) >> **Vibrator head H25HA**

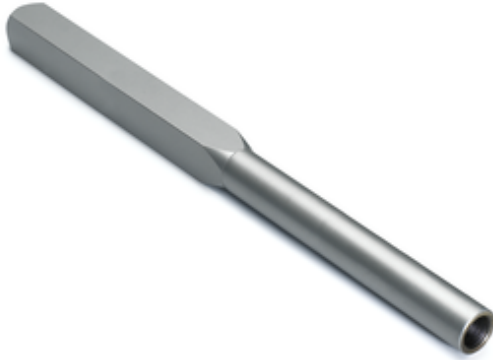

Vibrator head H25HA

Material number 5000610058

Hardened vibrator head for the modular internal vibrator HMS.
Designed for extra high mean amplitude. Square vibrator head shape.

Product details

- Complete induction hardened, highly wear resistant steel vibrator head
- Individual parts can be repaired or interchanged

You will find a large selection of matching motors and flexible shafts here in the shop.

Please note: the modular internal vibrator HMS consists of three components: motor, flexible shaft and vibrator head.

You will find possible combinations of motors (M), vibrator heads (H) and flexible shafts (SM) in the table above (see picture).

Comes with

- Vibrator head
- (motor and flexible shaft not included in the standard package)

Technical specifications

Vibrator head H25HA

OPERATING FLUIDS

Oil volume	0,010 l
Oil specification	Klüberoil 4UH1-46N

MECHANICAL - OUTPUT DETAILS

Amplitude at air	2,13 mm
Vibrations	12.000 1/min
Vibrations (Hz)	200 Hz

MECHANICAL DETAILS

Length Head	380 mm
Head diameter/-diagonal	26 mm
Head design	square
Weight	1,27 kg

ENVIRONMENT DATA

Storage temperature range	-30 - 80 °C
Operating temperature range	-30 - 45 °C

Custom Attributes

Model serie	HMS
Product line	Basic

Please Note

This product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the started power may vary due to specific operating conditions Subject to alterations and errors expected. Applicable also to illustrations.

Copyright © 2018 Wacker Neuson SE